FRAME HEIGHT AND RAMP ANGLE DATA

S/T TRUCK

S/T 10003 Pickup 1

Heights (To Ground) 1

Angle 1

Approach Angle(s) (Bottom of) 1

Departure Angle(s) (Bottom of) 1

108.0” Wheelbase – S 10603 2

118.0” Wheelbase – S 10803 2

123.0” Wheelbase – S 10653 3

122.9” Wheelbase – T 10643 3

123.0” Wheelbase – T 10653 4

S/T 10516 2-Door Utility 5

Heights (To Ground) 5

Angle 5

Approach Angle(s) (Bottom of) 5

Departure Angle(s) (Bottom of) 5

100.5” Wheelbase – S 10516 6

100.5” Wheelbase – T 10516 6

S/T 10506 4-Door Utility 7

Heights (To Ground) 7

Angle 7

Approach Angle(s) (Bottom of) 7

Departure Angle(s) (Bottom of) 7

107.0” Wheelbase – S 10506 8

107.0” Wheelbase – T 10506 8

FRAME HEIGHT AND RAMP ANGLE DATA

S/T TRUCK – *(Continued)*

S/T 15506, S/T 15806 4-Door Utility 9

Heights (To Ground) 9

Angle 9

Approach Angle(s) (Bottom of) 9

Departure Angle(s) (Bottom of) 9

113.0” Wheelbase – S 15506 10

129.0” Wheelbase – S 15806 10

113.0” Wheelbase – T 15506 11

129.0” Wheelbase – T 15806 11

C/K TRUCK

C/K 15000 Pickups 12

Heights (To Ground) 12

Angle 12

Approach Angle(s) (Bottom of) 12

Departure Angles(s) (Bottom of) 12

119.0” Wheelbase – C 15703 14

133.0” Wheelbase – C 15903 14

143.5” Wheelbase – C 15753 15

153.0” Wheelbase – C 15743 15

157.5” Wheelbase – C 15953 16

119.0” Wheelbase – K 15703 16

133.0” Wheelbase – K 15903 17

143.5” Wheelbase – K 15753 18

153.0” Wheelbase – K 15743 19

157.5” Wheelbase – K 15953 19

C/K TRUCK – *Continued*

C/K 25000 Pickups & Chassis-Cabs 20
133.0” Wheelbase – C 25903 20
143.5” Wheelbase – C 25753 20
153.0” Wheelbase – C 25743 21
157.5” Wheelbase – C 25953 21
167.0” Wheelbase – C 25943 21
133.0” Wheelbase – K 25903 22
143.5” Wheelbase – K 25753 22
153.0” Wheelbase – K 25743 23
157.5” Wheelbase – K 25953 23
167.0” Wheelbase – K 25943 24
C/K 35000 Pickups & Chassis-Cabs 24
157.5” Wheelbase – C 35953 24
167.0” Wheelbase – C 35943 24
133.0” Wheelbase – K 35903 25
157.5” Wheelbase – K 35953 25
167.0” Wheelbase – K 35943 26
C/K 36000 Chassis-Cabs 26
137.0” Wheelbase – C 36003 26
161.5” Wheelbase – C 36053 26
161.5” Wheelbase – C 36403 27
185.5” Wheelbase – C 36453 27
137.0” Wheelbase – K 36003 27
161.5” Wheelbase – K 36053 28
161.5” Wheelbase – K 36403 28

FRAME HEIGHT AND RAMP ANGLE DATA

C/K TRUCK – *Continued*

185.5” Wheelbase – K 36453 28

C/K 15000/25000 Utility 29

Heights (To Ground) 29

Angle 29

Approach Angle(s) (Bottom of) 29

Departure Angles(s) (Bottom of) 29

116.0” Wheelbase – C 15706 30

130.0” Wheelbase – C 15906 30

116.0” Wheelbase – K 15706 31

130.0” Wheelbase – K 15906 32

130.0” Wheelbase – C 25906 32

130.0” Wheelbase – K 25906 33

C/K 15000/25000 Avalanche 34

Heights (To Ground) 34

Angle 34

Approach Angle(s) (Bottom of) 34

Departure Angles(s) (Bottom of) 34

130.0” Wheelbase – C 15936 35

130.0” Wheelbase – K 15936 35

130.0” Wheelbase – C 25936 36

130.0” Wheelbase – K 25936 36

H2 HUMMER

H2 HUMMER 37

Heights (To Ground) 37

Angle 37

FRAME HEIGHT AND RAMP ANGLE DATA

HUMMER – *Continued*

Approach Angle(s) (Bottom of) 37
Departure Angle(s) (Bottom of) 37
000.0” Wheelbase – H2 38

M/L VAN

M/L 110(05, 06) 39
Heights (To Ground) 39
Angle 39
Approach Angle(s) (Bottom of) 39
Departure Angle(s) (Bottom of) 39
111.2” Wheelbase – M 11005 40
111.2” Wheelbase – M 11006 40
111.2” Wheelbase – L 11005 41
111.2” Wheelbase – L 11006 41

G/H VAN

G/H Full Body Van 42
Heights (To Ground) 42
Angle 42
Approach Angle(s) (Bottom of) 42
Departure Angle(s) (Bottom of) 42
135.0” Wheelbase – G 13405 43
135.0” Wheelbase – G 13406 43
135.0” Wheelbase – H 13405 43
135.0” Wheelbase – H 13406 44
135.0” Wheelbase – G 23405 44
135.0” Wheelbase – G 23406 45

G/H VAN – *Continued*

155.0” Wheelbase – G 23705 45
155.0” Wheelbase – G 23706 45
135.0” Wheelbase – H 23405 46
135.0” Wheelbase – G 33405 46
135.0” Wheelbase – G 33406 46
155.0” Wheelbase – G 33705 47
155.0” Wheelbase – G 33706 47

G/H Cutaway Van 48

Heights (To Ground) 48
Angle 48
Approach Angle(s) (Bottom of) 48
Departure Angle(s) (Bottom of) 48
139.0” Wheelbase – G 33503 49
159.0” Wheelbase – G 33803 50
177.0” Wheelbase – G 33903 50

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 10003 Pickup

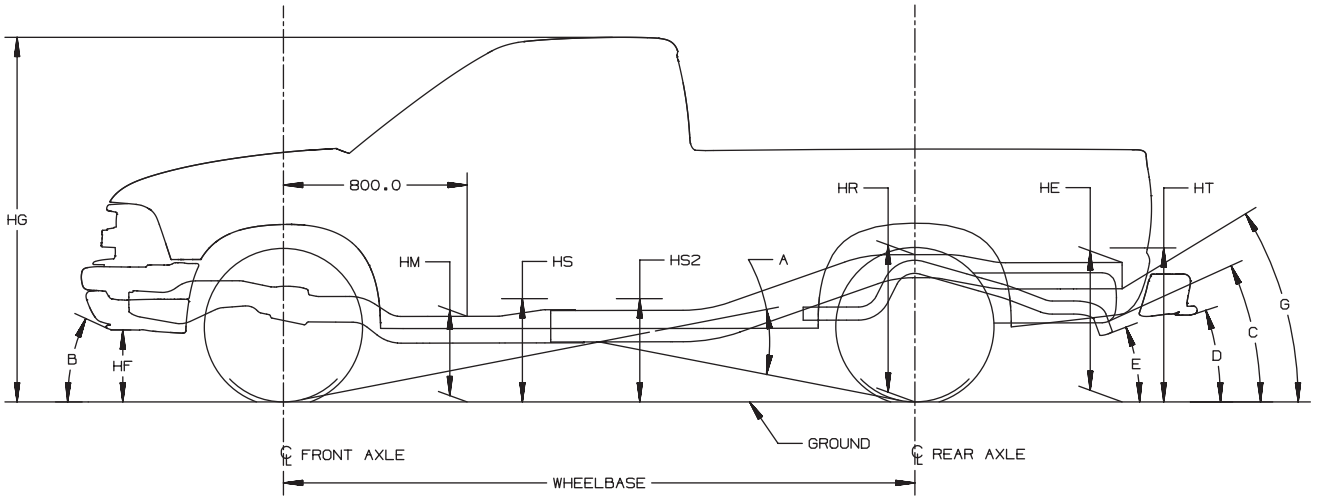

TD006064a

Heights (To Ground)

HE ..... Top of Frame at End

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM ..... Normal Top of Frame

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Air Deflector

Departure Angle(s) (Bottom of)

C ..... Spare Tire

D ..... Rear Bumper

E ..... Tail pipe

F ..... Platform Hitch

G ..... Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 10603	108.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 4200 **& Z83** P205/75R15	1857	1182	3039	2500	2300	–	12.4	62.7	14.7	–	25.7	18.0	–	27.0	–	10.5	60.9	12.9	–	22.4	16.2	–	22.6	20	23	17	15	17	–	–	–	–
[2] 4200 **& ZQ8** P235/55R16	1892	1228	3120	2500	2300	–	10.2	61.4	13.2	–	24.9	16.7	–	26.6	–	7.7	59.7	11.0	–	21.8	14.6	–	22.4	17	17	16	15	16	–	–	–	–
[2] 4600 **& Z85** P205/75R15	1861	1201	3062	2500	2700	–	11.9	63.5	15.2	–	27.3	18.8	–	29.2	–	10.4	61.2	13.1	–	22.7	16.5	–	23.1	21	23	18	16	18	–	–	–	–

S 10803	118.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 4600 **& Z85** P205/75R15	1789	1349	3138	2500	2700	26.0	12.3	63.3	15.2	–	26.9	18.6	–	28.6	20.6	10.4	61.2	13.0	–	22.8	16.4	–	23.1	19	23	15	14	18	–	24	–	–
[2] 4900 **& Z85** P205/75R15	1789	1349	3138	2500	2700	26.0	12.3	63.3	15.2	–	26.9	18.6	–	28.6	20.9	10.6	60.8	12.8	–	22.8	16.0	–	23.4	19	23	16	14	18	–	24	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S 10653 123.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 4400 **& Z83** P205/75R15	1856	1328	3184	2500	2300	–	12.6	62.4	14.6	–	25.1	17.7	18.9	26.2	–	10.7	60.7	12.7	–	22.3	15.9	17.1	22.8	18	23	17	15	17	–	–	–	–
[2] 4400 **& ZQ8** P235/55R16	1892	1374	3266	2500	2300	–	10.4	61.0	12.9	–	24.3	16.3	17.7	25.8	–	7.9	59.4	10.8	–	21.7	14.2	15.9	22.7	14	17	17	15	16	–	–	–	–
[2] 4600 **& Z85** P205/75R15	1861	1347	3208	2500	2700	–	12.1	63.3	15.0	–	26.8	18.4	19.9	28.5	–	10.4	61.2	13.0	–	22.7	16.4	17.5	23.2	19	23	18	16	18	–	–	–	–

T 10643 122.9" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 5150 **& Z85** P235/70R15	2457	1623	4080	2800	2700	26.9	13.9	65.0	16.5	–	27.9	19.9	21.3	29.4	22.6	13.4	63.3	15.2	–	24.6	18.3	19.4	25.1	19	29	22	18	24	–	31	–	–
[2] 5150 **& Z85** P235/75R15	2457	1623	4080	2800	2700	27.4	14.5	65.5	17.0	–	28.4	20.4	21.8	29.9	23.2	13.9	63.8	15.8	–	25.2	18.9	19.9	25.7	20	30	22	19	25	–	32	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

T 10653	123.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
[1] 4900 **& ZR2** 31x10.5R15	2421	1688	4109	2800	2700	–	17.3	67.7	19.7	–	30.8	22.9	24.3	32.1	–	16.4	66.4	18.5	–	27.3	21.7	22.5	27.4	26	35	26	21	25	–	–	–	–
[2] 5150 **& Z85** P235/70R15	2274	1464	3738	2800	2700	–	13.9	65.0	16.7	–	28.5	20.2	21.6	30.1	–	12.8	62.8	14.9	–	24.7	18.1	19.2	25.3	19	28	22	19	24	–	–	–	–
[2] 5150 **& Z85** P235/75R15	2274	1464	3738	2800	2700	–	14.4	65.5	17.2	–	29.0	20.7	22.1	30.6	–	13.3	63.4	15.5	–	25.2	18.6	19.7	25.8	20	29	23	19	26	–	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 10516 2-Door Utility

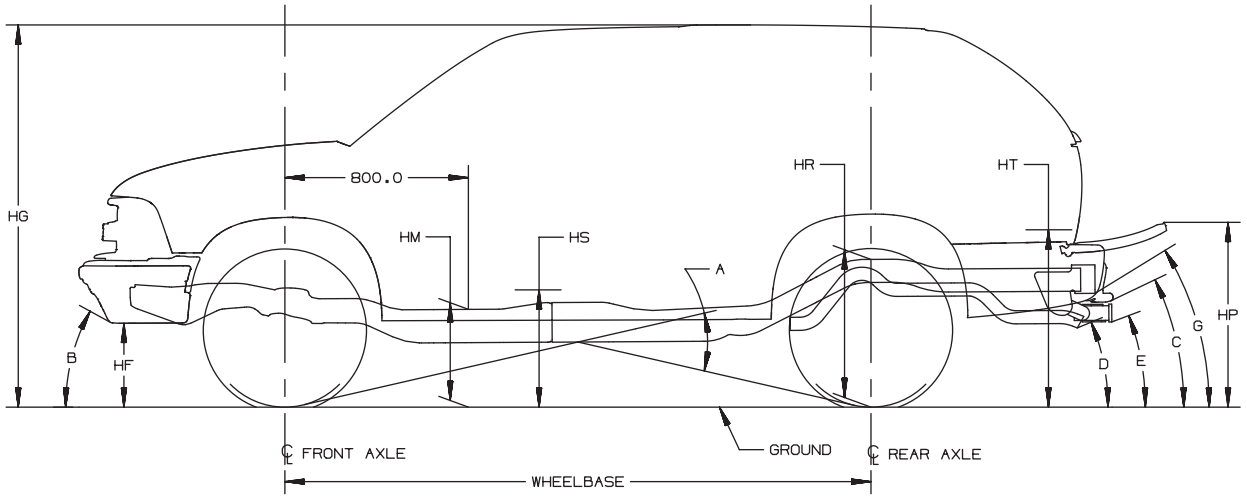

TD006064c

Heights (To Ground)

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM ..... Normal Top of Frame

HP ..... Top of Tailgate (Down)

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Air Deflector

Departure Angle(s) (Bottom of)

C ..... Rear Bumper

D ..... Tail pipe

E ..... Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 10516	100.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 4450 **& Z85** P205/75R15	1958	1588	3546	2200	2600	–	14.0	65.3	16.5	32.2	25.1	19.8	–	30.3	–	13.7	63.8	15.5	28.0	22.4	18.5	–	26.7	23	29	22	20	17	–	–	–	–
[2] 4450 **& Z85** P235/70R15	1958	1588	3546	2200	2600	–	14.4	65.7	16.9	32.6	25.6	20.2	–	30.7	–	14.1	64.2	15.9	28.4	22.9	18.9	–	27.1	24	30	22	20	17	–	–	–	–

T 10516	100.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 4850 **& Z85** P205/75R15	2146	1667	3813	2500	2700	–	13.7	65.1	16.2	32.0	24.9	19.6	–	30.1	–	12.8	63.4	14.9	27.9	22.2	18.1	–	26.6	23	27	22	19	17	–	–	–	–
[2] 4850 **& Z85** P235/70R15	2146	1667	3813	2500	2700	–	14.1	65.5	16.6	32.4	25.3	20.0	–	30.5	–	13.2	63.8	15.3	28.3	22.6	18.5	–	27.0	24	28	22	20	17	–	–	–	–
[2] 4850 **& ZM6** P235/75R15	2138	1731	3869	2500	2700	–	14.7	65.8	17.1	32.6	25.6	20.4	–	30.8	–	13.7	64.3	15.8	28.9	23.2	19.0	–	27.6	25	29	23	21	18	–	–	–	–
[2] 5000 **& ZR2** 31x10.5R15	2226	1866	4092	2500	2700	–	17.7	67.6	19.4	33.5	27.2	22.4	–	31.9	–	17.2	66.3	18.4	30.7	25.2	21.3	–	29.5	31	36	26	25	21	–	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 10506 4-Door Utility

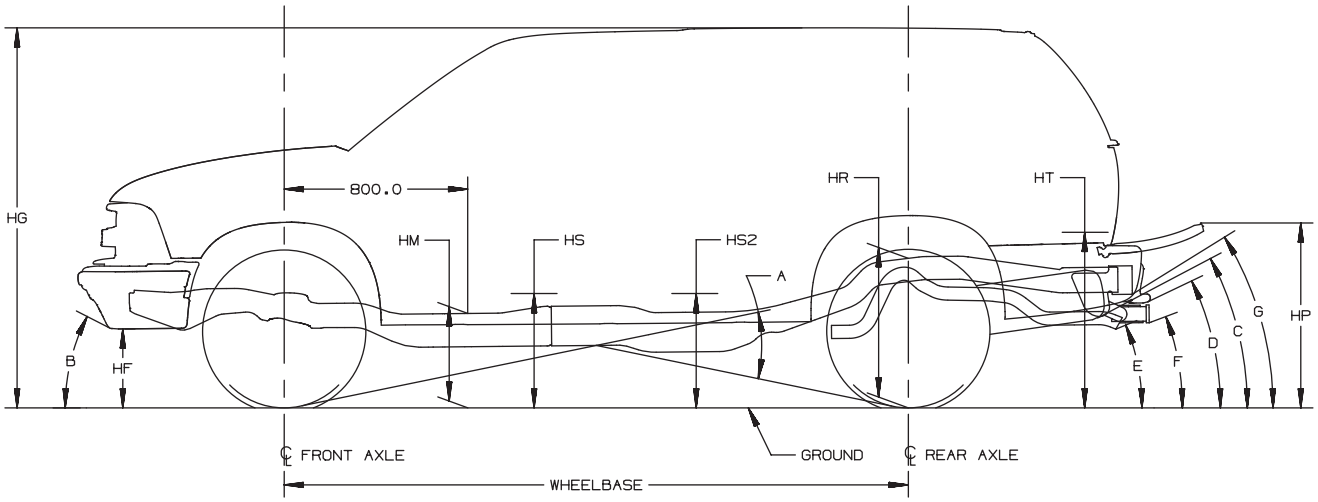

TD006064b

Heights (To Ground)

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM ..... Normal Top of Frame

HP ..... Top of Tailgate (Down)

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Air Deflector

Departure Angle(s) (Bottom of)

C ..... Spare Tire

D ..... Rear Bumper

E ..... Tail pipe

F ..... Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 10506	107.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 5000 **& ZW7** P235/70R15	2060	1664	3724	2500	2700	–	13.6	65.2	16.3	32.5	25.3	19.7	19.7	30.8	–	12.6	63.1	14.7	28.6	22.4	17.9	17.4	27.3	21	27	22	23	20	18	–	–	–
2) 5000 **& Z85** P205/75R15	2038	1659	3697	2500	2800	–	13.8	64.9	16.2	31.9	24.9	19.5	19.5	30.3	–	12.9	63.0	14.7	27.7	22.0	17.8	17.2	26.6	21	27	21	22	19	16	–	–	–

T 10506	107.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 5350 **& ZW7** P235/70R15	2421	1797	4218	2800	2700	–	14.1	65.0	16.4	31.7	24.8	19.6	19.5	30.2	–	13.2	63.1	15.0	28.4	22.5	18.0	17.5	27.2	21	28	22	22	20	17	–	–	–
2) 5350 **& Z85** P235/70R15	2401	1794	4195	2800	2900	–	14.1	65.0	16.4	31.9	24.9	19.7	19.6	30.3	–	13.0	63.3	15.0	27.8	22.3	18.1	17.5	26.7	21	28	21	22	19	17	–	–	–
2) 5350 **& Z85** P205/75R15	2401	1794	4195	2800	2900	–	13.7	64.6	16.0	31.4	24.5	19.3	19.2	29.8	–	12.7	62.9	14.6	27.3	21.9	17.7	17.1	26.3	20	27	20	21	19	16	–	–	–
2) 5350 **& Z85** P235/75R15	2401	1794	4195	2800	2900	–	14.6	65.5	16.9	32.4	25.4	20.2	20.1	30.8	–	13.6	63.8	15.5	28.3	22.8	18.6	18.0	27.2	22	29	22	22	20	17	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 15506, S/T 15806 4-Door Utility

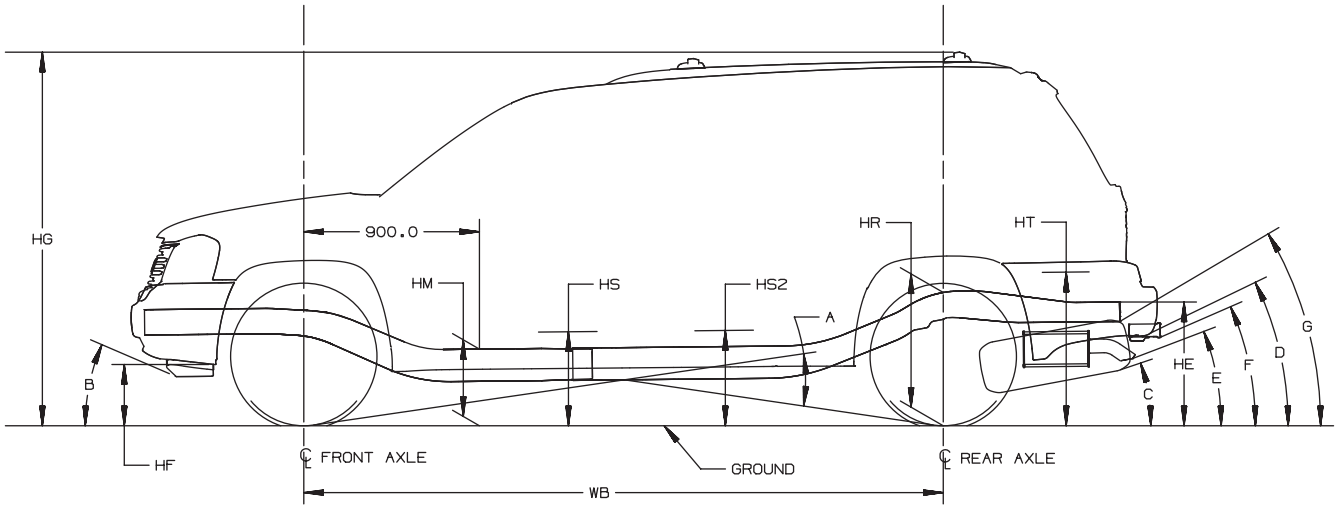

TD006035a

Heights (To Ground)

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM ..... Normal Top of Frame

HP ..... Top of Tailgate (Down)

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Air Deflector

Departure Angle(s) (Bottom of)

C ..... Spare Tire

D ..... Rear Bumper

E ..... Tail pipe

F ..... Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 15506	113.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 5550 P245/65R17	2316	1957	4723	2950	3200	–	8.9	73.4	15.7	–	28.9	18.8	20.2	34.0	–	6.9	71.1	13.5	–	24.9	16.7	17.3	28.9	16	19	18	23	19	21	–	–	–
[2] 5550 P245/70R16	2316	1957	4723	2950	3200	–	8.7	73.2	15.4	–	28.7	18.6	20.0	33.8	–	6.6	70.9	13.3	–	24.7	16.4	17.1	28.6	16	19	18	22	19	21	–	–	–

S 15806	129.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 6200 P245/65R17	2507	2256	4763	3100	3400	–	8.6	76.3	15.1	–	29.6	18.3	19.4	33.0	–	6.7	74.2	13.2	–	26.8	16.3	17.2	29.6	16	20	21	23	21	23	–	–	–
[1] 6200 **& LM4** P245/65R17	2545	2267	4812	3100	3400	–	10.2	76.2	16.0	–	29.5	19.2	19.8	32.5	–	8.7	74.2	14.3	–	26.9	17.6	18.0	29.4	17	24	21	23	20	23	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

T 15506	113.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 5750 P245/65R17	2462	1995	4457	2950	3200	–	9.1	73.3	15.7	–	28.8	18.9	20.2	33.8	–	7.8	70.8	13.7	–	25.0	16.9	17.3	28.9	17	21	18	23	19	21	–	–	–
[2] 5750 P245/70R16	2462	1995	4457	2950	3200	–	8.9	73.1	15.5	–	28.6	18.7	20.0	33.6	–	7.6	70.5	13.5	–	24.7	16.7	17.1	28.7	16	21	18	23	19	21	–	–	–
[2] 5750 **& Z70** P255/60R17	2509	1972	4481	2950	3200	–	8.9	71.8	14.8	–	27.1	18.0	18.8	31.7	–	7.2	71.5	13.8	–	26.7	17.0	18.5	31.3	16	20	21	25	22	24	–	–	–

T 15806	129.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 6400 P245/65R17	2653	2290	4943	3200	3400	–	8.8	76.2	15.2	–	29.5	18.4	19.4	32.8	–	7.3	73.9	13.4	–	26.7	16.6	17.3	29.6	16	21	21	23	21	23	–	–	–
[1] 6400 **& LM4** P245/65R17	2694	2302	4996	3200	3400	–	10.0	76.1	15.9	–	29.4	19.1	19.7	32.5	–	8.8	74.0	14.3	–	26.9	17.5	17.8	29.4	17	25	21	23	21	23	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C/K Truck - Pickups

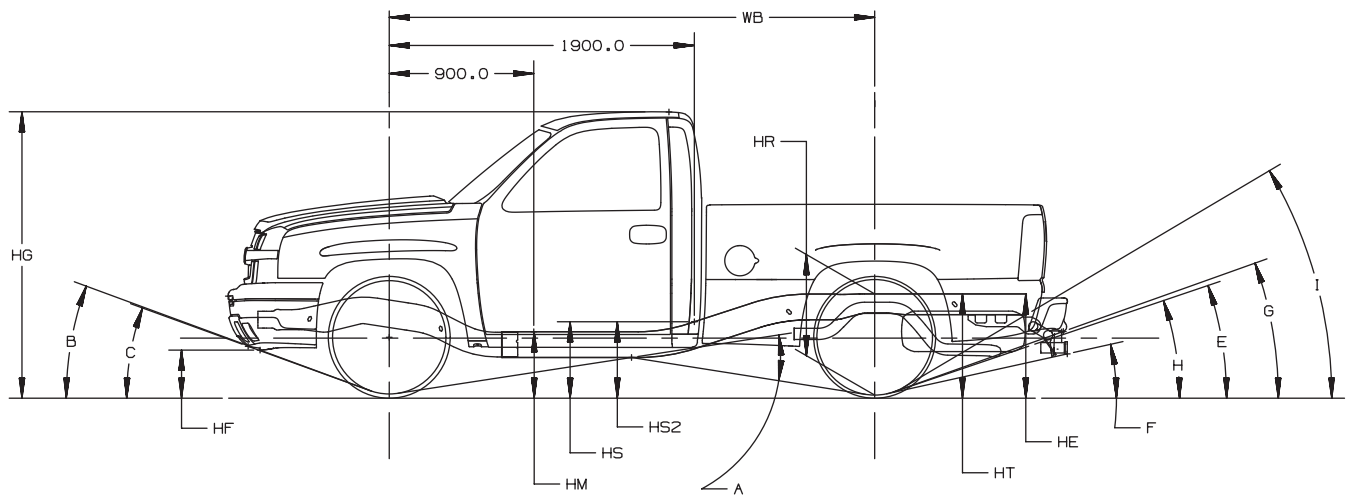

TD006040a

Heights (To Ground)

HE ..... Top of Frame at End

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof height to ground

HM ..... Normal Top of Frame

HP ..... Top of Tailgate

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Bumper

C ..... Front Air Deflector

Departure Angles(s) (Bottom of)

D ..... Fuel Tank and Shield

E ..... Spare Tire

F ..... Platform Hitch

G ..... Rear Bumper

H ..... Exhaust

I ..... Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

C/K Truck - Chassis-Cab

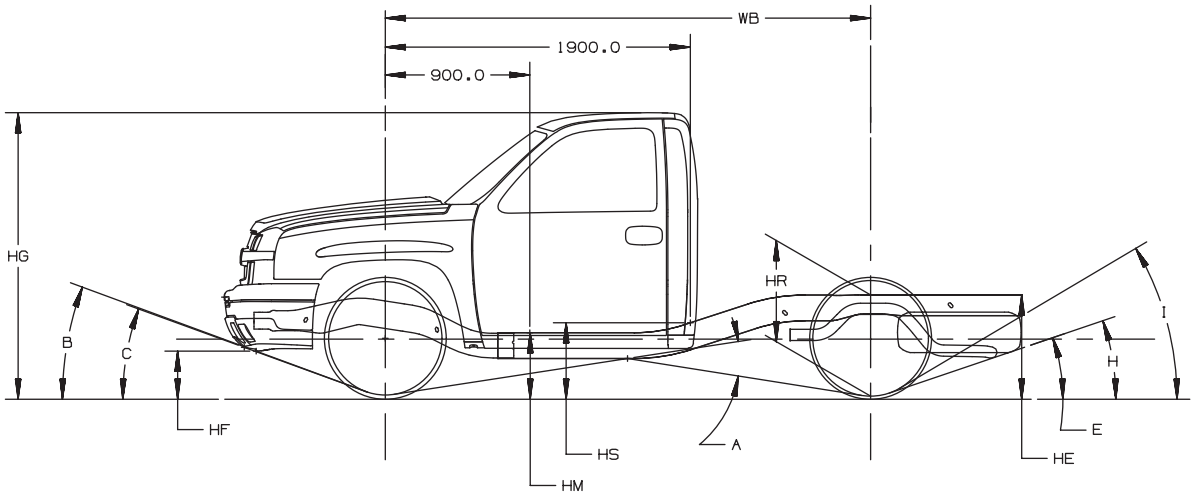

TD006040b

Heights (To Ground)

HE ..... Top of Frame at End

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof height to ground

HM ..... Normal Top of Frame

HP ..... Top of Tailgate

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Bumper

C ..... Front Air Deflector

Departure Angles(s) (Bottom of)

D ..... Fuel Tank and Shield

E ..... Spare Tire

F ..... Platform Hitch

G ..... Rear Bumper

H ..... Exhaust

I ..... Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

C 15703	119.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 6100 P235/75R16	2392	1656	4048	3150	3686	30.2	9.1	9.3	71.4	16.3	28.8	19.6	–	32.9	23.7	7.5	7.7	68.4	13.8	23.8	17.1	–	26.1	18	29/37	19/18	–	20	15	21	20	31
2) 6100 P255/70R16	2392	1656	4048	3150	3686	30.3	9.2	9.4	71.5	16.4	28.9	19.8	–	33.0	23.8	7.7	7.9	68.6	14.0	23.9	17.3	–	26.3	19	29/37	19/18	–	19	15	21	20	32

C 15903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 6400 P235/75R16	2478	1710	4188	3150	3686	30.2	9.7	9.8	71.3	16.5	28.9	19.8	–	32.9	24.0	8.5	8.7	68.5	14.1	24.0	17.5	–	26.5	17	30/38	20/19	–	20	14	19	20	28
2) 6400 P255/70R16	2478	1710	4188	3150	3686	30.3	9.8	9.9	71.5	16.6	29.0	19.9	–	33.0	24.2	8.6	8.8	68.6	14.3	24.2	17.6	–	26.7	17	30/39	21/19	–	20	14	20	21	28

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 15753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 6200 P235/75R16	2666	1780	4446	3600	3686	29.5	9.8	10.0	71.6	16.3	28.5	19.6	20.7	32.2	23.7	7.7	7.9	69.3	14.1	23.9	17.4	18.5	26.1	16	29/37	19/18	–	20	15	21	20	31
[2] 6200 P255/70R16	2666	1780	4446	3600	3686	29.7	9.9	10.0	71.7	16.4	28.7	19.7	20.8	32.3	23.8	7.7	7.9	69.4	14.1	24.1	17.5	18.6	26.3	16	29/37	19/18	–	20	15	21	20	32
[2] 6200 LT245/75R16	2666	1780	4446	3600	3686	30.0	10.4	10.6	72.1	16.9	29.0	20.2	21.2	32.6	24.3	8.4	8.5	69.8	14.7	24.6	18.0	19.1	26.7	17	30/38	20/19	–	20	15	21	20	32
[2] 6600 **& NYS** P255/70R16	2772	2227	4999	3600	4000	29.1	9.6	9.8	71.3	16.1	28.2	19.4	20.4	31.8	23.8	7.7	7.9	69.2	14.1	24.0	17.4	18.4	26.2	16	29/37	19/18	–	20	15	21	20	32

C 15743	153.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 8600 LT245/75R16	3091	2311	5402	4410	6000	32.2	13.1	13.3	75.2	20.4	31.4	22.9	23.7	34.8	26.3	11.2	11.4	72.7	18.2	26.8	20.6	21.6	28.7	14	36/44	26/24	–	18	14	20	19	27
[1] 8600 **& NYS** LT245/75R16	3103	2294	5397	4410	6000	32.9	13.0	13.2	75.5	20.6	31.9	23.1	24.0	35.5	26.6	11.2	11.4	72.8	18.2	27.0	20.7	21.7	29.0	14	36/44	26/24	–	18	15	20	20	28

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 15953 157.5" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 6400 P235/75R16	2891	1823	4714	3600	3686	29.4	9.9	10.1	71.3	16.2	28.4	19.5	20.5	32.1	23.7	8.6	8.8	69.4	14.4	23.9	17.7	18.6	26.1	15	31/39	21/20	–	20	13	19	20	28
2) 6400 P255/70R16	2805	1712	4517	3600	3686	29.6	10.0	10.2	71.5	16.3	28.6	19.7	20.6	32.2	23.8	8.8	9.0	69.5	14.5	24.1	17.8	18.7	26.2	15	31/39	21/20	–	20	13	19	20	28

K 15703 119.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 6100 P245/75R16	2612	1829	4441	3925	3750	31.6	12.2	12.3	73.6	18.8	30.5	22.1	–	34.3	25.6	8.7	8.8	71.1	16.0	26.0	20.7	–	28.1	23	31/40	21/20	–	23	17	23	24	34
2) 6100 LT245/75R16	2612	1829	4441	3925	3750	31.9	12.5	12.7	73.9	19.1	30.8	22.4	–	34.5	26.1	9.2	9.3	71.5	16.4	26.4	21.1	–	28.6	23	31/40	21/20	–	23	17	23	24	34
2) 6100 P265/75R16	2612	1829	4441	3925	3750	32.3	12.8	13.0	74.2	19.4	31.2	22.8	–	34.9	26.3	9.4	9.5	71.8	16.6	26.6	21.3	–	28.7	24	33/41	23/21	–	23	18	24	25	35
2) 6100 LT265/75R16	2612	1829	4441	3925	3750	32.4	13.3	13.5	74.5	19.8	31.3	23.1	–	35.0	26.4	10.0	10.1	72.1	17.1	26.8	21.7	–	28.9	24	33/41	23/21	–	24	18	24	25	35

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 6400 P245/75R16	2709	1776	4485	3925	3750	31.9	12.2	12.3	73.5	18.7	30.7	22.0	–	34.5	25.6	9.1	9.2	71.0	16.0	26.0	19.3	–	28.0	21	32/40	22/20	–	23	15	21	24	30
[2] 6400 LT245/75R16	2709	1776	4485	3925	3750	32.1	12.5	12.7	73.8	19.0	31.0	22.4	–	34.8	26.1	9.6	9.7	71.4	16.4	26.4	19.8	–	28.5	21	32/40	22/21	–	23	15	21	24	30
[2] 6400 P265/75R16	2709	1776	4485	3925	3750	32.5	12.8	13.0	74.1	19.4	31.3	22.7	–	35.2	26.2	9.7	9.9	71.6	16.6	26.6	20.0	–	28.7	22	34/42	24/22	–	23	16	22	25	31
[2] 6400 LT265/75R16	2709	1776	4485	3925	3750	32.6	13.3	13.5	74.4	19.7	31.5	23.0	–	35.2	26.4	10.3	10.5	72.0	17.1	26.8	20.4	–	28.8	22	34/42	24/22	–	23	16	22	25	31

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 6400 P245/75R16	2988	1827	4815	3925	3750	31.6	12.2	12.3	73.7	18.5	30.6	21.9	22.9	34.2	25.5	9.8	10.0	71.7	16.4	26.0	19.7	20.9	27.9	20	34/42	24/22	–	23	17	23	24	34
[2] 6400 LT245/75R16	2988	1827	4815	3925	3750	31.8	12.5	12.7	74.1	18.9	30.9	22.2	23.2	34.4	26.0	10.3	10.5	72.1	16.8	26.4	20.1	21.3	28.5	20	34/42	24/22	–	23	17	23	24	34
[2] 6400 P265/75R16	2988	1827	4815	3925	3750	32.2	12.8	13.0	74.4	19.2	31.2	22.5	23.5	34.8	26.2	10.5	10.6	72.3	17.0	26.6	20.3	21.5	28.6	21	35/44	25/23	–	23	17	24	25	35
[2] 6400 LT265/75R16	2988	1827	4815	3925	3750	32.3	13.3	13.5	74.7	19.6	31.4	22.9	23.8	34.9	26.3	11.1	11.3	72.7	17.5	26.9	20.8	21.8	28.8	21	35/44	25/23	–	23	17	24	25	35
[2] 6900 **& NYS** P245/75R16	2981	2231	5212	3925	4000	31.2	12.2	12.4	73.5	18.5	30.3	21.8	22.7	33.8	25.9	9.9	10.1	71.4	16.2	26.1	19.5	20.6	28.3	20	34/42	24/22	–	23	17	24	24	34
[2] 6900 **& NYS** P265/75R16	2981	2231	5212	3925	4000	31.8	12.9	13.0	74.2	19.1	30.9	22.4	23.4	34.4	26.5	10.6	10.8	72.1	16.9	26.8	20.2	21.3	29.0	21	35/44	25/23	–	24	18	25	26	35
[2] 6900 **& NYS** LT245/75R16	2981	2231	5212	3925	4000	31.5	12.6	12.8	73.9	18.8	30.6	22.1	23.1	34.1	26.4	10.4	10.6	71.9	16.7	26.6	20.0	21.1	28.8	20	34/42	24/22	–	22	17	24	24	35
[2] 6900 **& NYS** LT265/75R16	2981	2231	5212	3925	4000	32.7	13.3	13.4	74.9	19.7	31.8	23.0	24.0	35.4	27.7	11.0	11.2	72.8	17.5	27.8	20.8	22.0	30.2	21	35/44	25/23	–	24	18	25	26	36
[2] 7200 **& NYS** P265/70R17	3046	2353	5399	3925	4000	31.4	12.8	12.9	73.9	18.9	30.6	22.2	23.1	34.0	26.7	11.1	11.3	71.8	17.0	26.8	20.3	21.0	29.2	21	36/45	27/24	–	24	18	25	26	36

↑ **CENTENNIAL**

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15743 153.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 8600 LT245/75R16	3429	2393	5822	4410	6000	32.1	13.1	13.2	75.1	20.4	31.3	22.8	23.6	34.7	26.2	11.7	11.9	72.9	18.5	26.8	21.0	21.8	28.6	19	37/45	27/25	–	18	14	19	19	27
1) 8600 **& NYS** LT245/75R16	3433	2406	5839	4410	6000	32.7	13.0	13.1	75.3	20.5	31.7	23.0	23.8	35.3	26.5	11.7	11.9	73.0	18.5	27.0	21.0	21.9	28.8	19	37/45	27/25	–	18	14	20	19	28

K 15953 157.5" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 6400 P245/75R16	3115	1883	4998	3925	3750	31.2	12.2	12.4	73.3	18.4	30.3	21.7	22.5	33.8	25.4	10.6	10.8	71.8	16.7	25.9	20.0	20.9	27.8	18	35/43	25/23	–	22	15	21	23	30
1) 6400 LT245/75R16	3115	1883	4998	3925	3750	31.5	12.6	12.8	73.7	18.7	30.6	22.0	22.9	34.1	25.9	11.1	11.3	72.2	17.1	26.3	20.4	21.3	28.3	18	35/43	25/23	–	22	15	21	23	30
2) 6400 P265/75R16	3115	1883	4998	3925	3750	31.9	12.9	13.0	74.0	19.0	30.9	22.3	23.2	34.5	26.0	11.2	11.4	72.4	17.3	26.5	20.6	21.6	28.4	19	37/45	27/25	–	23	16	21	25	31
2) 6400 LT265/75R16	3115	1883	4998	3925	3750	31.9	13.4	13.6	74.3	19.4	31.1	22.7	23.5	34.5	26.2	11.8	12.0	72.8	17.8	26.8	21.1	21.9	28.6	19	37/45	27/25	–	23	16	21	25	31

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 25903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[2] 8500 **AF** LT245/75R16	3019	2469	5488	4100	6000	33.8	13.2	13.4	74.0	20.2	32.8	22.9	–	34.3	28.3	11.7	11.9	72.3	18.3	28.9	20.9	–	28.7	19	37/45	27/25	–	20	15	21	27	29
[1] 8600 LT245/75R16	2908	1929	4837	4100	6000	35.1	13.0	13.1	74.6	20.5	33.9	23.3	–	35.7	28.4	11.5	11.7	72.1	18.1	28.9	20.8	–	28.8	19	36/45	26/24	–	20	16	21	27	29
[2] 8600 **& ZW9** LT245/75R16	2910	1574	4484	4100	6000	36.1	12.8	13.0	74.9	20.7	34.5	23.5	–	–	28.4	11.5	11.7	72.1	18.1	28.9	20.8	–	–	19	36/45	26/24	–	–	–	–	27	29
[2] 9200 LT245/75R16	2861	2131	4992	4410	6084	34.8	13.0	13.2	76.4	20.4	33.6	25.2	–	37.3	28.6	10.9	11.1	73.8	17.7	28.9	22.4	–	31.1	18	35/43	25/23	–	21	16	23	27	29
[2] 9200 **& ZW9** LT245/75R16	2872	1769	4641	4410	6084	35.7	12.9	13.0	76.8	20.6	34.3	25.4	–	–	28.6	10.9	11.1	73.8	17.7	28.9	22.4	–	–	18	35/43	25/23	–	–	–	–	27	29

C 25753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 9200 LT245/75R16	3036	2191	5227	4410	6084	34.5	13.1	13.2	76.8	20.3	33.5	25.0	25.7	37.0	28.6	11.2	11.4	74.0	17.8	28.9	22.5	23.3	31.1	18	36/44	26/24	–	21	18	26	21	33

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 25743 153.0" Wheelbase	Minimum Curb Weight			GAWR		Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
[1] 9200 LT245/75R16	3087	2316	5403	4410	6084	34.1	13.2	13.3	77.3	20.2	33.3	24.9	25.6	36.6	28.6	11.3	11.5	74.6	17.8	28.9	22.5	23.3	31.1	17	36/44	26/24	–	21	18	26	27	33

C 25953 157.5" Wheelbase	Minimum Curb Weight			GAWR		Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
[2] 8500 **AF** LT245/75R16	3255	2750	6005	4500	6084	33.1	13.3	13.5	76.0	20.0	32.4	24.6	25.0	35.6	28.2	11.4	11.5	74.9	18.1	28.9	22.7	24.2	30.7	17	36/44	26/24	–	22	15	22	27	29
[1] 9200 LT245/75R16	3157	2197	5354	4500	6084	34.5	13.2	13.3	76.6	20.2	33.5	25.0	25.5	37.0	28.6	11.3	11.5	74.1	17.8	28.9	22.5	23.5	31.1	17	36/44	26/24	–	22	16	23	27	29

C 25943 167.0" Wheelbase	Minimum Curb Weight			GAWR		Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
[1] 9200 LT245/75R16	3193	2374	5567	4670	6084	34.0	13.2	13.4	77.1	20.1	33.2	24.8	25.4	36.5	28.6	11.1	11.3	74.7	17.7	28.9	22.3	23.4	31.0	16	35/44	26/24	–	21	16	23	22	29
[2] 9200 **& ZW9** LT245/75R16	3201	2032	5233	4670	6084	34.9	13.1	13.3	77.4	20.2	33.8	25.0	25.8	–	28.6	11.1	11.3	74.7	17.7	28.9	22.3	23.4	–	16	35/44	26/24	–	–	–	–	22	29

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 25903 133.0" Wheelbase	Minimum Curb Weight			GAWR		Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
[2] 8500 **AF** LT245/75R16	3206	2753	5959	4500	6084	33.2	13.3	13.4	75.5	20.1	32.4	24.8	–	35.7	28.1	11.2	11.4	74.7	18.1	28.9	22.8	–	30.6	19	36/44	26/24	–	20	15	22	27	29
[2] 9200 **& ZW9** LT245/75R16	3115	1789	4904	4500	6084	35.7	12.9	13.0	76.4	20.6	34.3	25.4	–	–	28.5	11.2	11.4	74.0	17.9	28.9	22.5	–	–	18	36/44	26/24	–	–	–	–	27	29
[1] 9200 LT245/75R16	3094	2214	5308	4500	6084	34.6	13.1	13.2	76.0	20.4	33.5	25.1	–	37.1	28.5	11.1	11.3	74.0	17.9	28.9	22.5	–	31.0	18	36/44	26/24	–	21	16	23	27	29
[2] 9200 **& ZW9** LT245/75R16	3117	1791	4908	4800	6084	35.7	12.9	13.1	76.4	20.6	34.3	25.4	–	–	28.5	10.6	10.8	74.0	17.7	28.9	22.4	–	–	18	34/43	25/23	–	–	–	–	27	29
[2] 9200 LT245/75R16	3169	2145	5314	4800	6084	34.8	13.1	13.2	76.1	20.4	33.6	25.2	–	37.3	28.5	10.7	10.9	74.1	17.7	28.9	22.4	–	31.0	18	35/43	25/23	–	21	16	23	27	29

NOTE: Vehicles in rows 7 & 8 have (VYU).

K 25753 143.5" Wheelbase	Minimum Curb Weight			GAWR		Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
[1] 8600 LT245/75R16	3215	2061	5276	4410	6000	34.8	13.0	13.1	74.9	20.3	33.8	23.1	23.7	35.3	28.4	11.4	11.6	72.6	18.1	28.9	20.8	21.9	28.9	19	36/44	26/24	–	20	17	25	21	33
[2] 8600 **& VYU** LT245/75R16	3214	2062	5276	4500	6000	34.8	13.0	13.2	74.9	20.4	33.8	23.1	23.7	35.3	28.4	11.3	11.4	72.6	18.1	28.9	20.7	21.9	28.9	19	36/44	26/24	–	20	17	25	21	33
[2] 9200 LT245/75R16	3235	2164	5399	4670	6084	34.5	13.1	13.2	76.8	20.3	33.6	25.1	25.7	37.0	28.5	11.1	11.2	74.1	17.8	28.9	22.5	23.5	31.0	18	35/44	26/24	–	20	17	25	21	33
[2] 9200 **& VYU** LT245/75R16	3235	2165	5400	4800	6084	34.5	13.1	13.3	76.8	20.3	33.6	25.1	25.7	37.0	28.5	10.9	11.0	74.2	17.7	28.9	22.4	23.5	31.0	18	35/43	25/23	–	20	17	25	21	33

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 25743 153.0" Wheelbase	Frame Heights at Minimum Curb Weight													Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 9200 LT245/75R16	3339	2339	5678	4670	6084	34.1	13.1	13.3	77.2	20.2	33.2	24.9	25.6	36.6	28.5	11.2	11.4	74.7	17.9	28.9	22.5	23.4	31.0	17	36/44	26/24	–	21	17	25	27	33
[2] 9200 **& VYU** LT245/75R16	3412	2431	5843	4800	6084	33.8	13.2	13.4	77.2	20.1	33.1	24.8	25.5	36.3	28.5	11.2	11.4	74.8	17.9	28.9	22.5	23.5	31.0	17	36/44	26/24	–	20	17	25	27	33

K 25953 157.5" Wheelbase	Frame Heights at Minimum Curb Weight													Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[2] 8500 **AF** LT245/75R16	3470	2770	6240	4670	6084	33.1	13.3	13.5	75.9	19.9	32.4	24.6	25.0	35.6	28.2	11.4	11.5	75.1	18.1	28.9	22.8	24.3	30.6	17	36/44	26/24	–	22	15	22	27	29
[1] 9200 LT245/75R16	3372	2217	5589	4670	6084	34.5	13.1	13.3	76.5	20.2	33.5	24.9	25.5	37.0	28.5	11.3	11.5	74.3	17.9	28.9	22.5	23.7	31.0	17	36/44	26/24	–	22	16	23	27	29
[2] 9200 **& VYU** LT245/75R16	3375	2220	5595	4800	6084	34.5	13.2	13.3	76.5	20.2	33.5	24.9	25.5	37.0	28.5	11.1	11.3	74.3	17.8	28.9	22.5	23.7	31.0	17	35/44	26/24	–	22	16	23	27	29

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 25943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 9200 LT245/75R16	3447	2461	5908	4800	6084	33.8	13.3	13.5	77.0	20.1	33.0	24.7	25.6	36.3	28.5	11.3	11.5	74.9	17.9	28.9	22.5	23.6	30.9	16	36/44	26/24	–	20	16	23	22	29
2) 9200 **& ZW9** LT245/75R16	3436	2198	5634	4800	6084	34.5	13.2	13.4	77.2	20.2	33.5	24.9	25.7	–	28.5	11.3	11.5	74.9	17.8	28.9	22.5	23.6	–	16	36/44	26/24	–	–	–	–	22	29

C 35953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 11400 LT215/85R16	3158	2693	5851	4670	8550	35.2	13.1	13.2	76.8	20.4	34.0	25.1	25.7	37.7	28.5	11.1	11.3	74.4	17.6	28.9	22.2	23.8	31.0	16	35/44	26/24	–	22	16	23	27	29

C 35943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 11400 LT215/85R16	3238	2779	6017	4670	8550	34.9	13.1	13.3	77.4	20.3	33.9	25.0	25.8	37.4	28.5	11.2	11.4	75.0	17.6	28.9	22.3	23.7	31.0	15	36/44	26/24	–	22	16	23	22	29
2) 11400 **& ZW9** LT215/85R16	3251	2370	5621	4670	8550	35.9	13.1	13.2	77.9	20.5	34.6	25.2	26.2	–	28.5	11.4	11.6	75.0	17.7	28.9	22.3	23.7	–	15	36/44	26/24	–	–	–	–	22	29

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 35903 133.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 11400 LT215/85R16	3173	2534	5707	4500	8550	35.7	12.9	13.1	76.4	20.6	34.3	25.5	–	38.2	28.4	11.5	11.7	74.4	17.9	28.9	22.5	–	30.9	18	36/44	26/24	–	22	15	23	27	29
[2] 11400 **& ZW9** LT215/85R16	3172	2208	5380	4500	8550	36.5	12.8	12.9	76.7	20.8	34.9	25.7	–	–	28.4	11.5	11.7	74.4	17.9	28.9	22.5	–	–	18	36/44	26/24	–	–	–	–	27	29
[2] 11400 **& VYU** LT215/85R16	3186	2535	5721	4800	8550	35.7	12.9	13.1	76.4	20.6	34.3	25.5	–	38.2	28.4	10.9	11.1	74.4	17.6	28.9	22.3	–	30.9	18	35/43	25/23	–	22	15	23	27	29
[2] 11400 **& ZW9** LT215/85R16	3185	2209	5394	4800	8550	36.5	12.8	12.9	76.7	20.8	34.9	25.7	–	–	28.4	10.9	11.1	74.4	17.6	28.9	22.3	–	–	18	35/43	25/23	–	–	–	–	27	29

K 35953 157.5" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 11400 LT215/85R16	3391	2629	6020	4800	8550	35.3	13.1	13.2	76.9	20.4	34.1	25.1	25.8	37.8	28.4	11.3	11.5	74.6	17.8	28.9	22.4	24.0	30.9	16	36/44	26/24	–	22	15	23	27	29

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 35943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 11400 LT215/85R16	3503	2803	6306	4800	8550	34.8	13.1	13.3	77.4	20.3	33.8	25.0	25.8	37.3	28.4	11.5	11.7	75.1	17.8	28.9	22.4	23.9	30.9	15	36/44	26/24	–	22	15	23	22	29
2) 11400 **& ZW9** LT215/85R16	3503	2476	5979	4800	8550	35.6	13.0	13.2	77.7	20.4	34.4	25.1	26.1	–	28.4	11.5	11.7	75.1	17.8	28.9	22.4	23.9	–	15	36/44	26/24	–	–	–	–	22	29

C 36003	137.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 11400 LT215/85R16	2978	2429	5407	4500	8550	33.3	13.0	13.2	76.2	20.6	31.8	25.3	–	–	26.9	11.0	11.2	74.4	17.8	27.1	22.4	–	–	17	35/43	25/23	28	–	–	–	23	24

C 36053	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
1) 11400 LT215/85R16	3215	2575	5790	4670	8550	32.8	13.1	13.3	76.6	20.3	31.6	25.0	25.6	–	26.8	11.1	11.3	74.6	17.8	27.1	22.4	24.0	–	15	35/44	26/24	28	–	–	–	23	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 36403	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 11400 LT215/85R16	3118	2368	5486	4670	8550	33.3	13.1	13.2	76.0	20.4	31.9	25.1	–	–	26.8	11.0	11.2.	74.5	17.7	27.1	22.3	–	–	15	35/43	25/23	28	–	–	–	23	24

C 36453	185.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 11400 LT215/85R16	3358	2518	5876	4800	8550	32.8	13.2	13.4	76.4	20.3	31.7	24.9	25.4	–	26.8	11.3	11.5	74.8	17.8	27.1	22.3	24.2	–	13	36/44	26/24	28	–	–	–	23	24

K 36003	137.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 12000 LT215/85R16	3189	2615	5804	4670	8600	32.9	13.0	13.2	76.0	20.5	31.5	25.2	–	–	27.0	11.1	11.2	74.0	17.8	27.1	22.4	–	–	17	35/44	25/24	28	–	–	–	23	24
[2] 12000 **& VYU** LT215/85R16	3199	2622	5821	4800	8600	32.9	13.1	13.3	76.1	20.5	31.5	25.2	–	–	27.0	10.9	11.1	74.1	17.7	27.1	22.3	–	–	17	35/44	25/23	28	–	–	–	23	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 36053	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 12000 LT215/85R16	3451	2755	6206	4800	8600	32.4	13.2	13.4	76.5	20.3	31.3	24.9	25.4	–	26.9	11.4	11.6	74.3	17.9	27.1	22.5	23.7	–	15	36/44	26/24	28	–	–	–	23	24

K 36403	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 12000 LT215/85R16	3356	2554	5910	4800	8600	32.8	13.2	13.3	75.9	20.4	31.6	25.0	–	–	27.0	11.2	11.4	73.7	17.8	27.1	22.4	–	–	15	36/44	26/24	28	–	–	–	23	24

K 36453	185.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	HE	HF	HF (mce)	HG	HM	HR	HS	HS2	HT	A	B/mce	C/mce	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 12000 LT215/85R16	3559	2724	6283	4800	8600	32.3	13.3	13.4	76.2	20.2	31.4	24.8	25.2	–	26.9	11.6	11.8	74.4	18.0	27.1	22.5	23.8	–	13	36/45	26/24	28	–	–	–	23	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C/K Truck - Utility

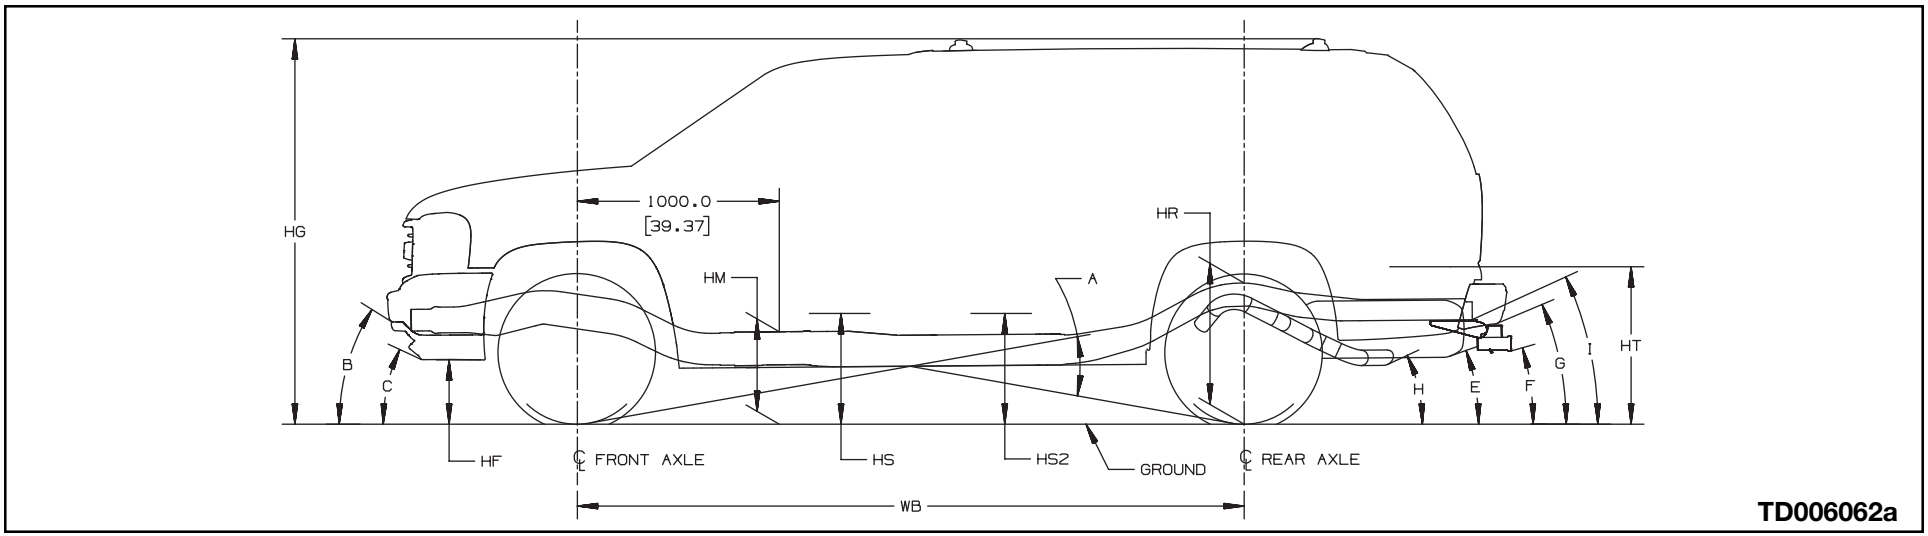

Heights (To Ground)

HE ..... Top of Frame at End

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof height to ground

HM ..... Normal Top of Frame

HP ..... Top of Tailgate

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Bumper

C ..... Front Air Deflector

Departure Angles(s) (Bottom of)

D ..... Fuel Tank and Shield

E ..... Spare Tire

F ..... Platform Hitch

G ..... Rear Bumper

H ..... Exhaust

I ..... Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

C 15706 116.0" Wheelbase	Minimum Curb Weight			GAWR		Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
[1] 6500 P245/75R16	2537	2381	4918	3200	3750	–	12.6	76.8	18.0	–	28.4	21.8	22.3	31.0	–	10.4	75.0	16.0	–	26.3	19.8	20.6	28.5	22	41	24	–	23	17	30	29	–
[2] 6500 P265/70R16	2537	2381	4918	3200	3750	–	12.6	76.9	18.0	–	28.4	21.9	22.3	31	–	10.5	75.1	16.1	–	26.4	19.9	20.7	28.6	23	41	24	–	23	18	30	29	–
[2] 6800 P245/75R16	2590	2512	5102	3200	4000	–	12.7	76.5	17.7	–	27.9	21.6	22.0	30.4	–	10.7	74.7	15.9	–	25.6	19.8	20.2	27.6	22	41	24	–	22	16	28	27	–
[2] 6800 P265/70R16	2590	2512	5102	3200	4000	–	12.7	76.5	17.8	–	28.0	21.7	22.0	30.5	–	10.8	74.8	16.0	–	25.7	19.8	20.2	27.7	22	42	24	–	22	16	28	27	–
[2] 6800 **& Z75** P265/70R17	2664	2613	5277	3200	4000	–	14.8	76.6	18.4	–	27.7	22.5	22.3	29.7	–	13.5	75.4	16.3	–	26.3	20.6	21.1	27.9	24	48	30	–	22	17	29	28	–

NOTE: Roof Rack is required on ('06) except W/BPH. Also K15936 w/Z75.

C 15906 130.0" Wheelbase	Minimum Curb Weight			GAWR		Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
[1] 7000 P245/75R16	2638	2337	4975	3200	4000	–	12.5	76.7	18.1	–	28.9	21.9	22.6	31.7	–	11.3	73.7	15.8	–	25.4	19.8	19.9	27.4	20	43	25	–	21	14	24	26	–
[2] 7000 P265/70R16	2638	2337	4975	3200	4000	–	12.5	76.8	18.2	–	29.0	21.9	22.6	31.8	–	11.3	73.8	15.9	–	25.5	19.8	19.9	27.5	20	43	26	–	22	14	24	27	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15706	116.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
1) 6800 P245/75R16	2730	2423	5153	3600	3750	–	12.5	76.7	17.9	–	28.3	21.7	22.2	30.9	–	9.7	75.0	15.9	–	26.3	19.5	20.5	28.6	22	39	22	–	23	18	30	29	–
2) 6800 P265/70R16	2730	2423	5153	3600	3750	–	12.6	76.8	17.9	–	28.3	21.8	22.2	30.9	–	9.7	75.1	15.9	–	26.4	19.6	20.6	28.7	22	40	23	–	23	18	30	29	–
2) 6800 LT245/75R16	2730	2423	5153	3600	3750	–	12.8	77.0	18.1	–	28.5	21.9	22.4	31.1	–	10.0	75.3	16.2	–	26.7	19.8	20.8	29.0	22	40	22	–	23	18	30	29	–
2) 6800 P265/75R16	2730	2423	5153	3600	3750	–	13.2	77.4	18.5	–	28.9	22.4	22.8	31.5	–	10.3	75.7	16.5	–	27.0	20.2	21.2	29.3	23	41	24	–	24	18	31	30	–
2) 6800 LT265/75R16	2730	2423	5153	3600	3750	–	13.6	77.9	19.0	–	29.4	22.8	23.3	32.0	–	10.8	76.2	17.0	–	27.5	20.7	21.7	29.9	23	41	24	–	24	19	31	31	–
2) 6800 P265/70R17	2730	2423	5153	3350	3900	–	13.0	77.3	18.4	–	28.8	22.2	22.7	31.4	–	11.0	75.7	16.7	–	26.6	20.5	21.0	28.7	24	43	25	–	24	18	30	30	–
2) 6900 P245/75R16	2786	2555	5341	3600	4000	–	12.6	76.4	17.6	–	27.8	21.5	21.9	30.3	–	9.8	75.0	15.9	–	25.6	19.6	20.2	27.6	22	40	23	–	22	16	28	27	–
2) 6900 P265/70R16	2786	2555	5341	3600	4000	–	12.7	76.4	17.7	–	27.9	21.6	21.9	30.4	–	9.9	75.1	16.0	–	25.7	19.7	20.3	27.6	22	40	23	–	22	16	28	27	–
2) 6900 LT265/75R16	2786	2555	5341	3600	4000	–	13.7	77.5	18.8	–	29.0	22.6	23.0	31.5	–	11.0	76.2	17.1	–	26.9	20.8	21.4	28.8	24	42	24	–	23	17	29	28	–
2) 6900 P265/75R16	2786	2555	5341	3600	4000	–	13.3	77.0	18.3	–	28.5	22.2	22.5	31.0	–	10.5	75.7	16.6	–	26.7	20.3	21.1	28.7	24	42	24	–	23	18	30	29	–
2) 6900 LT245/75R16	2786	2555	5341	3550	4000	–	12.9	76.6	17.9	–	28.1	21.8	22.1	30.5	–	10.2	75.3	16.2	–	26.3	19.9	20.8	28.4	22	40	23	–	22	17	29	28	–
2) 7000 P265/70R17	2864	2642	5506	3550	4000	–	13.0	77.3	18.4	–	28.9	22.2	22.7	31.5	–	10.7	76	16.8	–	27.3	20.5	21.5	29.6	24	42	25	–	25	19	32	32	–

NOTE: Rack is required on (06) except w/BPH and K15936 & Z75.

↑ Column "A" is ramp angle 2001 model year.

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15906 130.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 7200 P245/75R16	2841	2378	5219	3600	4000	–	12.4	76.7	18.0	–	28.9	21.8	22.5	31.7	–	10.5	74.0	15.8	–	25.4	19.6	19.9	27.4	20	41	24	–	21	14	24	26	–
[2] 7200 P265/70R16	2841	2378	5219	3600	4000	–	12.5	76.7	18.1	–	28.9	21.9	22.6	31.7	–	10.6	74.0	15.8	–	25.5	19.7	19.9	27.5	20	42	24	–	22	14	24	27	–
[2] 7200 P265/70R17	2841	2378	5219	3550	4000	–	12.9	77.1	18.5	–	29.3	22.3	23.0	32.1	–	11.2	74.4	16.2	–	25.9	20.1	20.3	27.9	21	43	26	–	22	15	24	28	–
[2] 7200 P265/70R17	2841	2378	5219	3450	4000	–	12.9	77.2	18.6	–	29.4	22.4	23.1	32.2	–	11.6	74.4	16.3	–	26.0	20.3	20.4	28.0	21	44	26	–	23	15	25	28	–

C 25906 130.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 8600 LT245/75R16	2858	2595	5453	3800	5500	–	13.3	77.8	20.8	–	28.9	22.8	23.6	32.8	–	12.0	75.5	18.9	–	26.2	21.1	21.6	29.4	21	44	26	–	20	16	25	30	–
[1] 8600 **& NYS** LT245/75R16	2947	3046	5993	3800	5500	–	13.3	77.8	20.8	–	28.9	22.8	23.6	32.9	–	12.1	75.5	19.0	–	26.1	21.2	21.6	29.3	21	44	27	–	20	16	25	30	–

NOTE: Roof rack is required on (06) except w/BPH. Also K15936 w/Z75.

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 25906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
[1] 8600 LT245/75R16	3126	2649	5775	4180	5500	–	13.2	77.7	20.7	–	28.8	22.7	23.5	32.8	–	11.6	75.9	18.9	–	26.2	21.0	21.7	29.3	21	43	26	–	20	16	25	30	–
[1] 8600 **& NYS** LT245/75R16	3207	3098	6305	4180	5600	–	13.2	77.8	20.7	–	28.8	22.7	23.5	32.8	–	11.7	76.0	19.1	–	26.1	21.1	21.7	29.0	21	43	26	–	19	15	25	30	–

NOTE: Rack is required on (06) except w/BPH and K15936 & Z75.

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C/K Truck - Avalanche

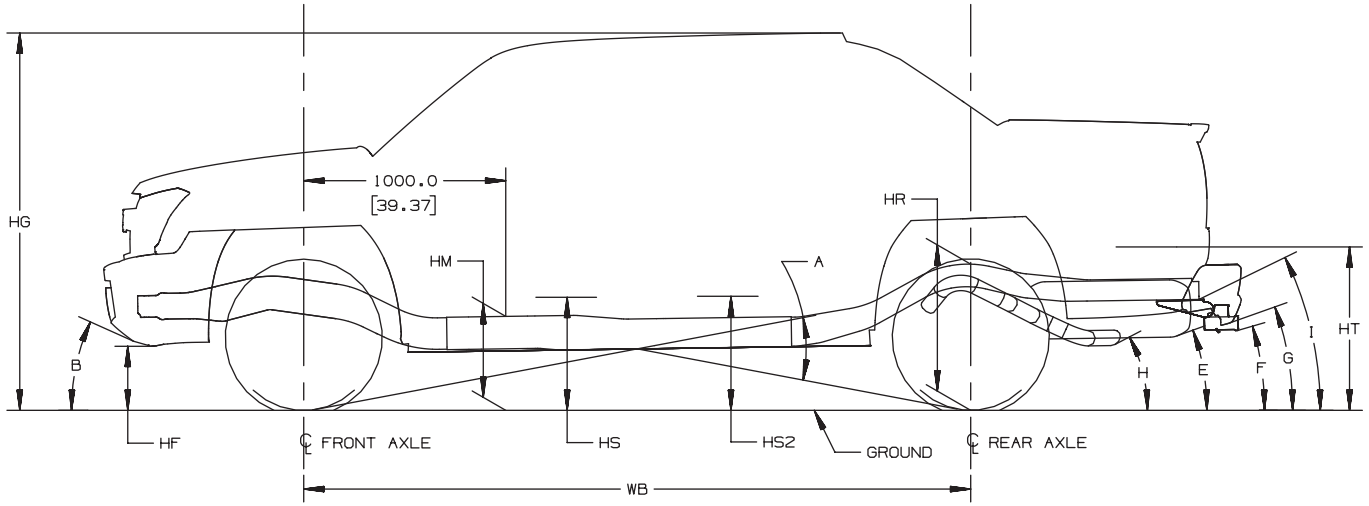

TD006062b

Heights (To Ground)

HE ..... Top of Frame at End

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof height to ground

HM ..... Normal Top of Frame

HP ..... Top of Tailgate

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Bumper

C ..... Front Air Deflector

Departure Angles(s) (Bottom of)

D ..... Fuel Tank and Shield

E ..... Spare Tire

F ..... Platform Hitch

G ..... Rear Bumper

H ..... Exhaust

I ..... Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

C 15936	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 6800 P265/70R16	2800	2620	5420	3400	4000	–	12.0	73.8	17.8	–	28.3	21.7	22.2	32.3	–	10.5	72.2	16.2	–	25.3	20.1	20.2	28.3	21	27	–	–	21	13	22	26	–
[2] 6800 P265/70R17	2800	2620	5420	3400	4000	–	12.6	73.8	18.0	–	28.2	21.9	22.2	32.0	–	10.8	72.9	16.8	–	26.9	20.6	21.4	30.2	22	28	–	–	24	16	25	31	–

K 15936	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 7000 P265/70R16	3046	2745	5791	3800	4000	–	12.0	73.7	17.7	–	28.2	21.6	22.1	32.2	–	9.8	72.4	16.2	–	25.3	19.9	20.2	28.3	21	26	–	–	21	13	22	26	–
[2] 7000 P265/70R17	3048	2747	5795	3800	4000	–	12.4	74.1	18.1	–	28.6	22.0	22.5	32.6	–	10.2	72.8	16.6	–	25.7	20.3	20.6	28.7	22	27	–	–	22	14	23	28	–
[2] 7000 **& Z75** P265/70R17	3085	2786	5871	3800	4000	–	12.8	75.7	17.6	–	27.6	21.7	21.8	31.2	–	10.5	75.2	16.4	–	26.9	20.2	21.4	30.2	21	23	–	–	24	16	20	31	–

NOTE: Rack is required on (06) except w/BPH and K15936 & Z75.

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 25936	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 8600 LT245/75R16	2831	2598	5429	4000	5500	–	12.9	74.6	20.2	–	28.0	22.5	23.0	33.1	–	11.9	72.9	18.8	–	25.4	21.1	21.4	29.6	21	30	26	–	18	14	23	30	–

K 25936	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 8600 LT245/75R16	3576	3268	6844	4380	5500	–	12.8	74.4	20.0	–	27.8	22.3	22.8	32.9	–	11.5	73.1	18.8	–	25.4	21.1	21.4	29.4	21	29	–	–	18	14	23	30	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

H2 HUMMER

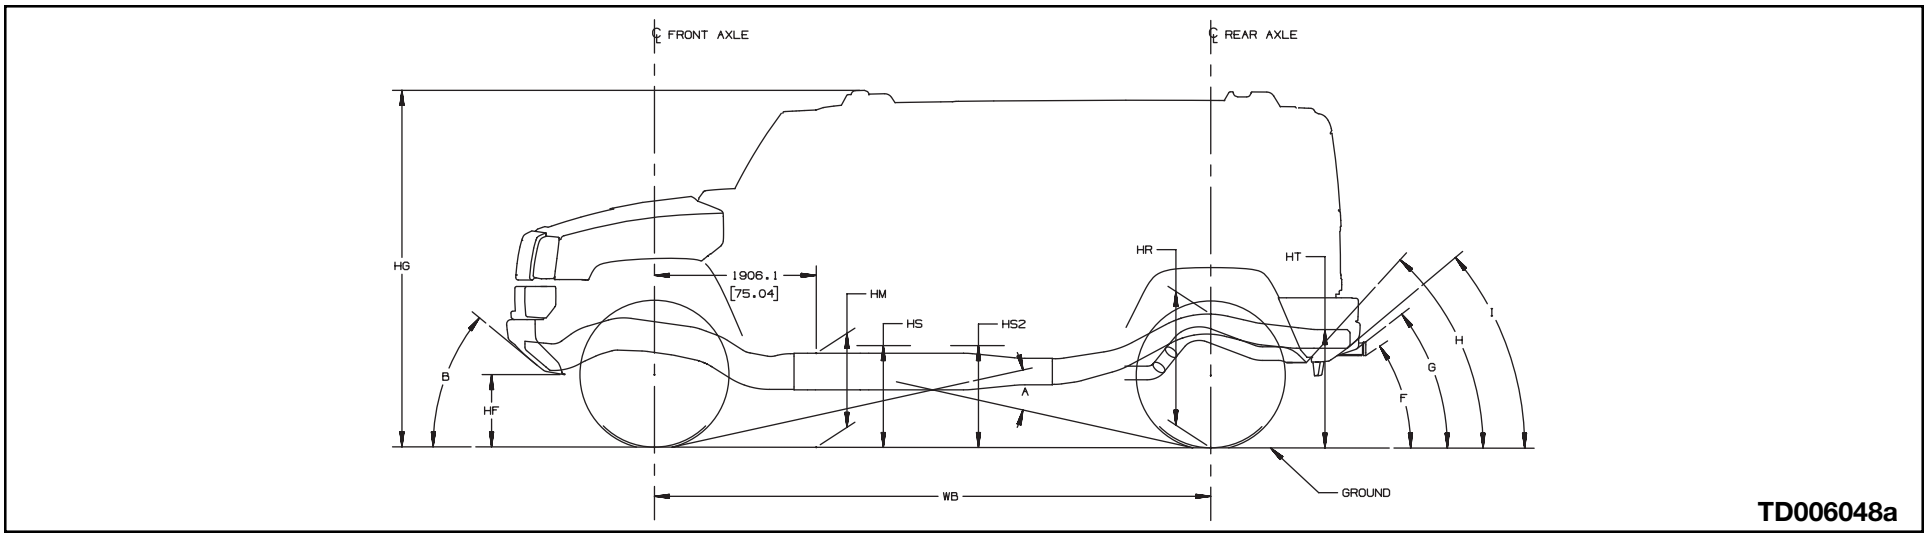

Heights (To Ground)

HF ..... Bottom of Front Bumper

HG ..... Top of Roof

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Air Dam

Departure Angle(s) (Bottom of)

C ..... Tail pipe

D ..... Spare Tire

E ..... Hitch

F ..... Rear Bumper

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

N25706	000.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 0000 P000/00R00	1111									–									–												

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

M/L 110(05, 06)

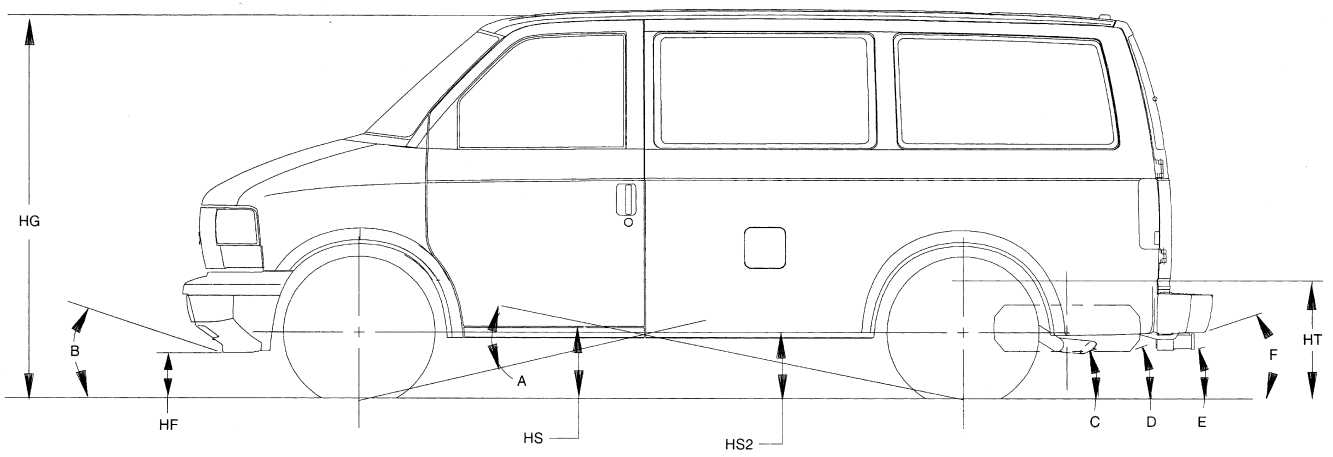

TD000000a

Heights (To Ground)

HF ..... Bottom of Front Bumper

HG ..... Top of Roof

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Air Dam

Departure Angle(s) (Bottom of)

C ..... Tail pipe

D ..... Spare Tire

E ..... Hitch

F ..... Rear Bumper

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

M 11005	111.2" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 5600 P215/70R16	2339	1616	3955	2800	3100	–	9.2	75.9	–	–	–	19.2	21.2	27.7	–	8.5	73.2	–	–	–	17.2	18.2	22.4	29	24	18	19	15	19	–	–	–
[2] 5900 P215/70R16	2344	1583	3927	2800	3100	–	9.4	76.0	–	–	–	19.3	21.3	27.8	–	8.7	72.6	–	–	–	16.9	18.0	22.6	29	25	18	19	15	19	–	–	–

M 11006	111.2" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 5900 P215/70R16	2352	2021	4373	2800	3100	–	9.5	75.0	–	–	–	18.7	20.3	26.0	–	8.5	72.5	–	–	–	16.7	17.8	22.5	28	24	18	19	15	19	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

L 11005	111.2" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 5850 P215/70R16	2559	1683	4242	3050	3100	–	9.6	75.7	–	–	–	19.2	21.0	27.2	–	8.7	73.2	–	–	–	17.2	18.2	22.2	29	25	17	18	15	18	–	–	–
[2] 6050 P215/70R16	2563	1649	4212	3050	3100	–	9.6	75.8	–	–	–	19.2	21.1	27.3	–	8.8	72.8	–	–	–	17.0	18.0	22.3	29	26	18	19	15	19	–	–	–

L 11006	111.2" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 6100 P215/70R16	2565	2034	4599	3050	3100	–	9.5	75.0	–	–	–	18.7	20.3	26.1	–	8.6	72.7	–	–	–	16.9	18.0	22.6	29	25	18	19	15	19	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G/H Van - Full Body

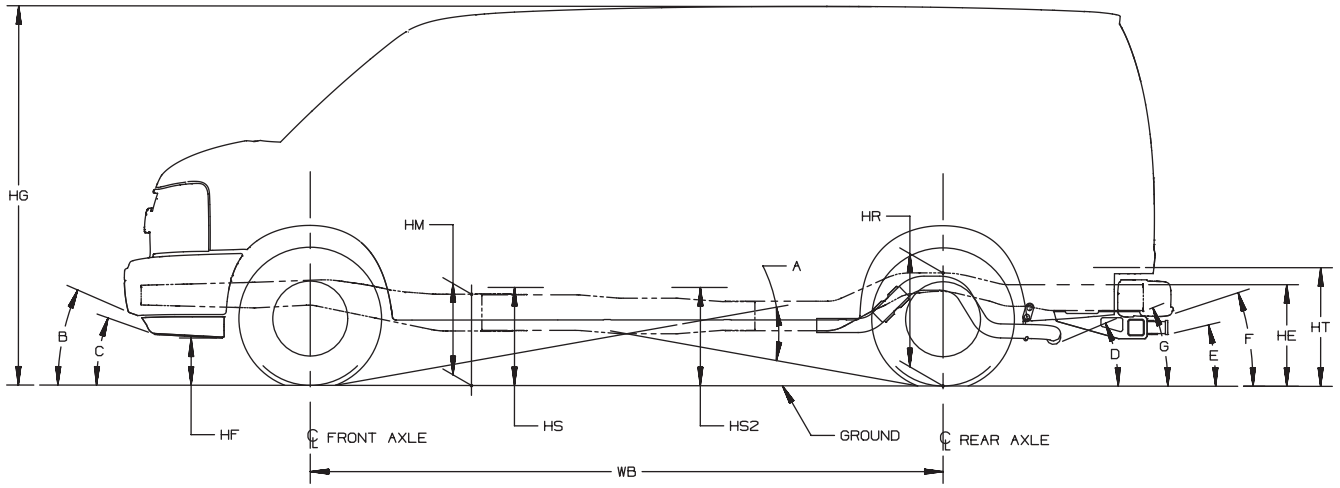

TD006028a

Heights (To Ground)

HE ..... Top of Frame at End

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM ..... Normal Top of Frame

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Air Deflector

C ..... Air Dam

Departure Angle(s) (Bottom of)

D ..... Tail pipe

E ..... Platform Hitch

F ..... Rear Bumper

G ..... Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

G 13405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 6200 P235/75R16	2920	1898	4818	3300	3200	–	14.8	81.0	17.3	24.5	17.5	18.2	20.3	26.0	–	14.3	79.5	16.3	22.2	16.5	16.8	18.9	23.1	20	30	23	21	12	18	–	–	–
[2] 7200 P235/75R16	2876	1773	4649	3600	4000	–	14.8	82.3	17.8	25.8	18.1	19.1	21.2	27.6	–	13.9	79.2	15.9	21.9	16.1	16.5	18.6	22.8	19	29	22	21	12	17	–	–	–

G 13406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 7200 P235/75R16	2733	2478	5211	3600	4000	–	15.3	81.1	17.6	24.4	17.8	18.4	20.4	25.8	–	13.7	79.1	15.8	21.9	16.0	16.4	18.5	22.8	19	29	22	21	12	17	–	–	–

H 13405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 7200 P235/75R16	2887	2068	4955	3600	4000	–	14.9	81.7	17.6	25.2	17.9	18.8	20.9	26.9	–	13.8	79.2	15.9	21.9	16.1	16.5	18.6	22.8	19	29	22	21	12	17	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

H 13406 135.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 7200 P235/75R16	2635	2380	5015	3600	3968	–	15.0	81.0	17.4	24.5	17.6	18.3	20.4	26.0	–	14.1	79.2	16.0	21.9	16.2	16.5	18.7	22.7	20	30	23	21	12	17	–	–	–

G 23405 135.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 7300 LT245/75R16	2663	2269	4932	3600	4380	–	15.7	82.9	18.6	26.4	18.8	19.9	21.9	28.2	–	14.1	80.3	16.6	22.9	16.8	17.5	19.6	23.8	20	29	22	23	13	18	–	–	–
[2] 8500 **& KL6** LT245/75R16	2876	2336	5212	4100	5360	–	17.3	83.8	19.9	27.3	20.2	21.0	23.1	28.9	–	15.2	81.6	17.7	24.4	18.0	18.9	20.9	25.2	22	31	24	26	15	20	–	–	–
[2] 8600 LT225/75R16	2778	2985	5763	4100	5360	–	17.3	82.5	19.2	25.7	19.4	19.8	21.9	26.9	–	14.7	80.9	17.2	23.8	17.4	18.3	20.2	24.7	21	30	23	25	14	19	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G 23406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[2] 8500 **& KL6** LT245/75R16	3029	2607	5636	4100	5360	–	17.1	83.3	19.6	26.9	19.8	20.6	22.7	28.4	–	15.2	81.6	17.7	24.4	18.0	18.9	20.9	25.2	22	31	24	26	15	20	–	–	–
[1] 8600 LT225/75R16	2925	3110	6035	4100	5360	–	17.0	82.3	19.0	25.6	19.2	19.7	21.7	26.9	–	14.7	80.9	17.2	23.8	17.4	18.3	20.2	24.7	21	30	23	25	14	19	–	–	–

G 23705	155.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 7300 LT245/75R16	2889	2139	5028	3600	4380	–	15.4	83.2	18.4	–	26.7	18.6	19.7	28.5	–	14.4	80.4	16.7	–	22.9	16.9	17.6	23.8	18	29	22	23	13	18	–	–	–
[2] 8500 **& KL6** LT245/75R16	3113	2196	5309	4300	5360	–	17.0	84.0	19.7	–	27.6	19.9	20.8	29.2	–	15.0	81.7	17.6	–	24.3	17.9	19.1	25.2	19	31	24	26	14	20	–	–	–
[2] 8600 LT225/75R16	3077	2146	5223	4300	5360	–	16.6	83.5	19.3	–	27.1	19.5	20.4	28.7	–	14.6	81.0	17.1	–	23.8	17.3	18.4	24.6	18	30	23	25	14	19	–	–	–

G 23706	155.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 8600 LT225/75R16	3306	2585	5891	4100	5360	–	16.5	82.8	18.9	–	26.3	19.2	19.9	27.8	–	15.3	81.1	17.5	–	23.8	17.7	18.5	24.6	19	31	24	24	14	19	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

H 23405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 7300 LT245/75R16	2635	2380	5015	3600	3968	–	15.5	82.7	18.4	26.2	18.6	19.6	21.7	28.0	–	14.3	80.3	16.7	22.9	16.9	17.5	19.7	23.7	20	29	22	23	13	18	–	–	–

G 33405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 9600 LT245/75R16	2901	2311	5212	4300	6084	–	17.4	84.1	20.0	27.7	20.3	21.2	23.3	29.3	–	15.1	81.3	17.5	24.3	17.8	18.7	20.7	25.3	22	31	24	27	15	20	–	–	–

G 33406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 9600 LT245/75R16	3044	2593	5637	4300	6084	–	17.2	83.6	19.7	27.2	20.0	20.9	22.9	28.8	–	15.1	81.3	17.5	24.3	17.8	18.7	20.7	25.3	22	31	24	27	15	20	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G 33705 155.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 9600 LT245/75R16	3128	2307	5435	4300	6084	–	17.0	84.1	19.7	27.7	20.0	20.9	–	29.3	–	15.2	81.3	17.5	24.3	17.8	18.8	–	25.3	19	31	24	27	15	20	–	–	–

G 33706 155.0" Wheelbase						Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	HE	HF	HG	HM	HR	HS	HS2	HS (LH)	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 9600 LT245/75R16	3339	2619	5958	4300	6084	–	17.0	83.5	19.6	27.2	19.8	20.6	–	28.7	–	15.5	81.4	17.9	24.3	18.0	18.9	–	25.3	19	32	25	27	15	20	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G/H Van - Cutaway

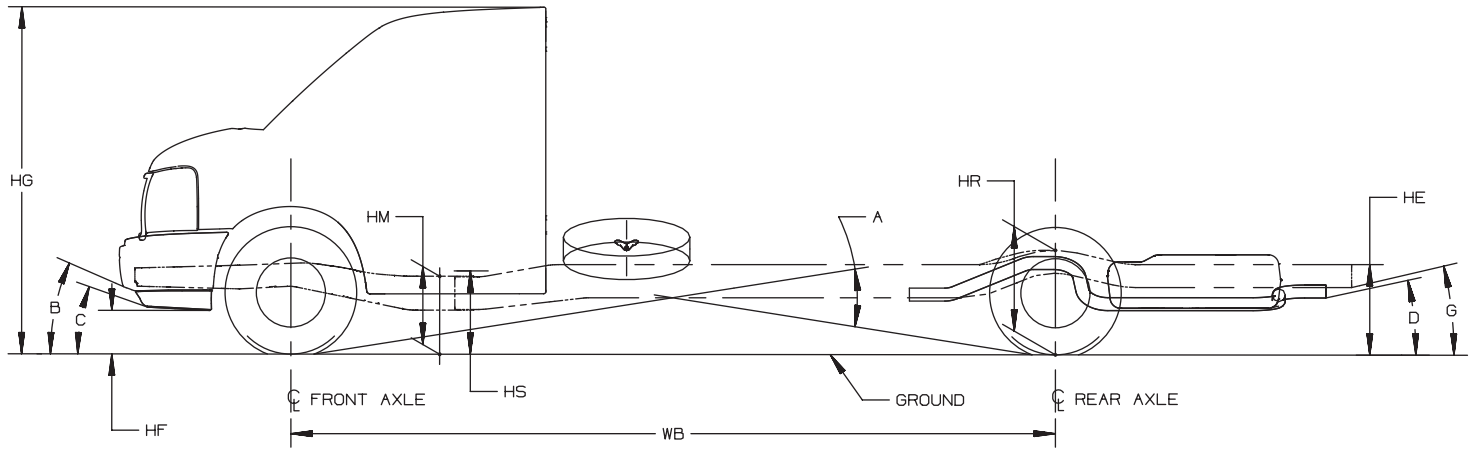

TD006028b

Heights (To Ground)

HE ..... Top of Frame at End

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM ..... Normal Top of Frame

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Air Deflector

C ..... Air Dam

Departure Angle(s) (Bottom of)

D ..... Tail pipe

E ..... Platform Hitch

F ..... Rear Bumper

G ..... Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

G 33503	139.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 9600 LT245/75R16	2838	1750	4588	4100	6084	28.6	16.9	83.7	24.9	–	29.8	20.9	–	–	25.0	14.7	81.8	22.5	–	27.0	18.6	–	–	24	30	23	21	–	–	18	–	–
[2] 10,000 LT225/75R16	2906	1905	4811	4100	7500	28.1	16.4	83.2	24.4	–	29.4	20.4	–	–	22.8	14.3	82.3	22.1	–	26.1	18.2	–	–	23	29	22	19	–	–	16	–	–
[2] 11,000 LT225/75R16	2906	1905	4811	4100	8250	28.2	16.4	83.2	24.4	–	29.4	20.4	–	–	23.0	14.4	82.0	22.0	–	26.0	18.2	–	–	23	29	22	19	–	–	16	–	–
[2] 11,500 LT225/75R16	2910	1994	4904	4300	8250	28.0	16.6	83.3	24.4	–	29.4	20.5	–	–	23.4	14.4	81.6	21.8	–	26.1	18.1	–	–	22	29	22	19	–	–	16	–	–
[2] 12,000 LT225/75R16	2906	1905	4811	4300	8600	28.1	16.6	83.3	24.5	–	29.4	20.5	–	–	23.4	14.4	81.4	21.8	–	26.0	18.0	–	–	22	29	22	19	–	–	16	–	–
[2] 12,300 LT225/75R16	2960	1995	4955	4300	8600	28.3	16.4	83.3	24.5	–	29.5	20.5	–	–	23.7	14.4	81.1	21.7	–	26.0	18.0	–	–	22	29	22	19	–	–	16	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G 33803	159.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 10,000 LT225/75R16	3059	1746	4805	4100	7500	28.2	16.1	82.8	23.9	–	29.5	20.0	–	–	22.9	14.4	82.2	21.8	–	26.1	18.0	–	–	22	29	22	15	–	–	16	–	–
[2] 11,000 LT225/75R16	3059	1746	4805	4100	8250	28.2	16.1	82.8	24.0	–	29.5	20.0	–	–	23.0	14.4	81.9	21.6	–	26.0	17.9	–	–	22	29	22	15	–	–	16	–	–
[2] 11,500 LT225/75R16	3059	1746	4805	4300	8250	28.1	16.3	82.9	24.0	–	29.5	20.2	–	–	23.3	14.4	81.5	21.5	–	26.0	17.9	–	–	21	29	22	15	–	–	16	–	–
[2] 12,000 LT225/75R16	3059	1746	4805	4300	8600	28.1	16.3	82.9	24.0	–	29.5	20.2	–	–	23.4	14.4	81.3	21.5	–	26.0	17.8	–	–	21	29	22	15	–	–	16	–	–
[2] 12,300 LT225/75R16	3109	1834	4943	4300	8600	28.3	16.2	82.9	24.0	–	29.6	20.1	–	–	23.6	14.4	81.0	21.4	–	26.0	17.8	–	–	21	29	22	16	–	–	16	–	–

G 33903	177.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																										
[1] 12,000 LT225/75R16	2651	2205	4856	4600	8600	27.3	17.4	83.3	24.2	–	29.3	20.6	–	–	23.2	14.3	81.4	21.3	–	26.0	17.7	–	–	19	29	22	15	–	–	16	–	–
[1] 12,300 LT225/75R16	2704	2287	4991	4600	8600	27.4	17.3	83.2	24.2	–	29.4	20.6	–	–	23.4	14.3	81.1	21.2	–	26.0	17.6	–	–	19	29	22	15	–	–	16	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model